

1**NEEDED TOOLS & SUPPLIES:**

- 3 Computer Velcro cable ties
- Super Glue or needle & thread
- 2"x3" Loop Velcro with adhesive back
- "Flat" Altitrack mount from L&B
- Dremel Rotary Tool
- Hand Drill
- 1/8" drill bit




1. This guide is only a suggestion for mounting your Altitrack to the BH Alt-Mount. BH, The author nor Larsen & Brusgaard are liable for loss and/or damage when using this guide. Please consult your personal rigger for any other further questions.

2

BOTTOM
SIDE
OF
MOUNT

VERTICAL
PART
OF
MOUNT

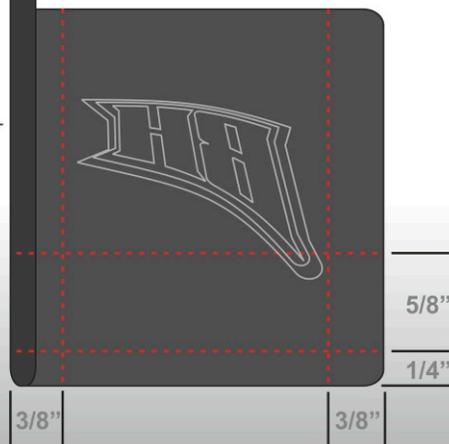


2. Measure out the above dimensional grid to determine slot and drilling placements.

3

BOTTOM
SIDE
OF
MOUNT


VERTICAL
PART
OF
MOUNT

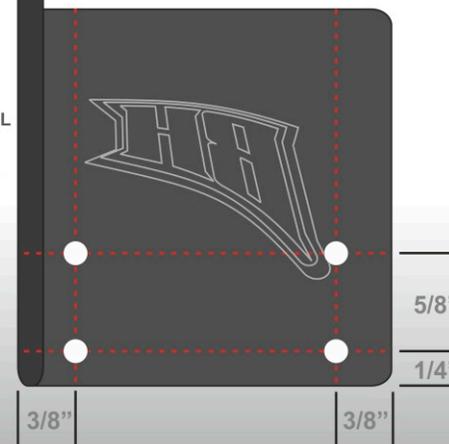


3. Using the 1/8" drill bit and drill, drill holes where the dimension lines cross.

4

BOTTOM
SIDE
OF
MOUNT

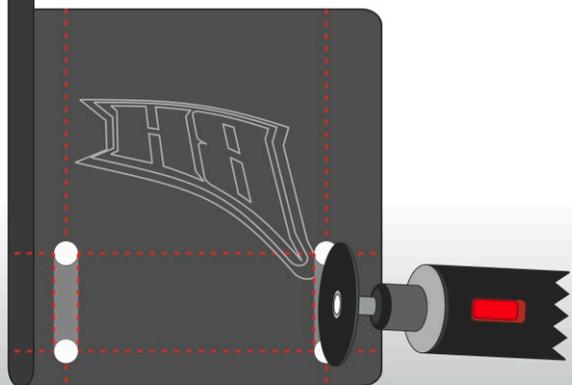

4. Use a Dremel or Rotary tool to remove the material in between the holes. Be careful and go slow.

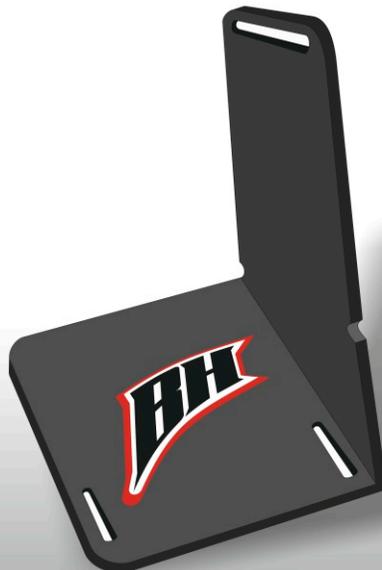5

5. Your altimeter mount should look like this when you are done with the Dremel tool.

6


3X
COMPUTER
WIRING
VELCRO
TIE



CUT HEAD OFF
VELCRO TIE



ALTI-TRACK
MOUNTING SLOT

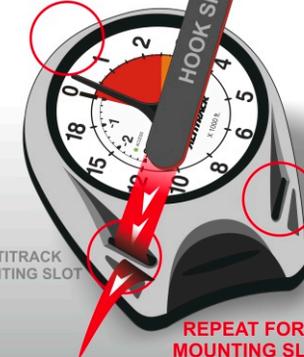

REPEAT FOR EACH
MOUNTING SLOT (3X)

6. Slip a Velcro wire tie through each of the mounting slots on the Altitrack. Make sure the hook side is facing OUT. Snip off the heads of the wire ties.



PULL 3/4" OUT OF MOUNTING SLOT

REPEAT FOR EACH MOUNTING SLOT (3X)


7. Pull each velcro tab through the mounting slot 3/4"



FOLD OVER LONG END & MATE VELCRO. SECURELY TOGETHER WITH SUPERGLUE OR SEW TOGETHER FOR ADDED SECURITY

REPEAT FOR EACH MOUNTING SLOT (3X)

8. Fold the long end of the velcro tab over and mate it to the short end. You can use either super glue or sew the loop together. Do this for each of the 3 tabs.

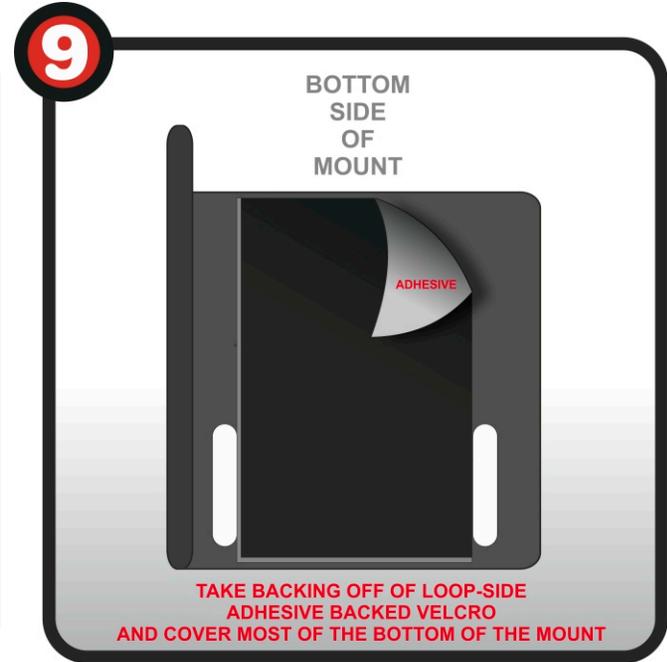

BOTTOM SIDE OF MOUNT


TAKE BACKING OFF OF LOOP-SIDE ADHESIVE BACKED VELCRO AND COVER MOST OF THE BOTTOM OF THE MOUNT

9. Peel the backing of of the large loop-side piece of velcro with the adhesive backing and adhere it to the bottom underside of the altimeter mount.



INSERT VELCRO TABS THROUGH SLOTS IN ALTIMETER MOUNT

10. Slip the 2 rear tabs through the slots you cut in the altimeter mount.

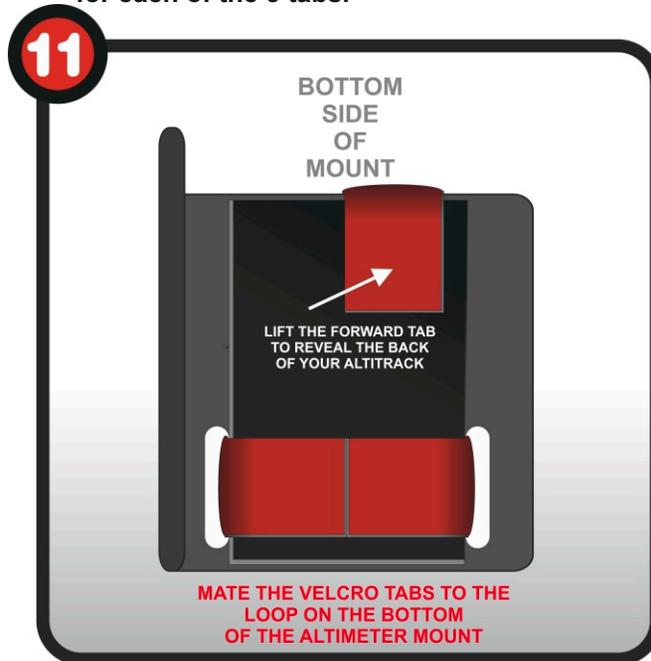


BOTTOM SIDE OF MOUNT

LIFT THE FORWARD TAB TO REVEAL THE BACK OF YOUR ALTRACK

MATE THE VELCRO TABS TO THE LOOP ON THE BOTTOM OF THE ALTIMETER MOUNT

11. Mate the velcro tabs to the loop velcro on the bottom of the altimeter mount. The single forward tab can be released to flip the altimeter over to use the computer functions.

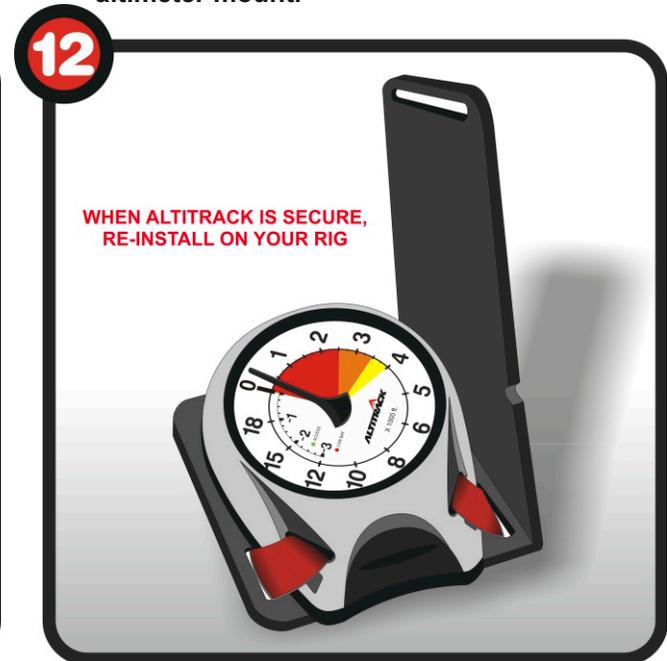

WHEN ALTRACK IS SECURE, RE-INSTALL ON YOUR RIG

12. Re-install on your rig following manufacturer's recommended instructions. Check your mount during each pack job to ensure your Altrack is secure and ready to jump.